

### RACCORDO A T PN25


TEE PN25



ARTICOLO	MISURE mm	BUTT WELDING - SDR11	
CODE	SIZES mm		
TEN 20	20 x 20 x 20	TEN 160T	160 x 160 x 160
TEN 25	25 x 25 x 25	TEN 200T	200 x 200 x 200
TEN 32	32 x 32 x 32	TEN 250T	250 x 250 x 250
TEN 40	40 x 40 x 40	TEN 315T	315 x 315 x 315
TEN 50	50 x 50 x 50	TEN 355T	355 x 355 x 355
TEN 63	63 x 63 x 63		
TEN 75	75 x 75 x 75		
TEN 90	90 x 90 x 90		
TEN 110	110 x 110 x 110		
TEN 125	125 x 125 x 125		
TEN 160	160 x 160 x 160		

### SPECIFICHE TECNICHE

TECHNICAL SPECIFICATIONS

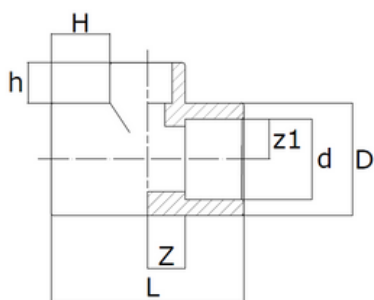


CODE	d	D	L	Z	Z <sub>1</sub>	h	H	weight (g)
TEN 20	20	30	55	11	15	13	13	26
TEN 25	25	35	64	14	18	14	14	38
TEN 32	32	44	78	18,5	22	16	16	68
TEN 40	40	55	87	17	28	16	16	100
TEN 50	50	69	103	25	35	17	17	198
TEN 63	63	87	125	34	44	17	21	362
TEN 75	75	97	142	40	47,5	20	20	512
TEN 90	90	116	157	46	58	21	21	750
TEN 110	110	141	193	55	70	26	26	1284
TEN 125	125	160	215	60	80	28	28	1680
TEN 160	160	190	247	80	95	27	27	2540

# RACCORDI A SALDARE

## WELDING FITTINGS

### SPECIFICHE TECNICHE

#### TECHNICAL SPECIFICATIONS

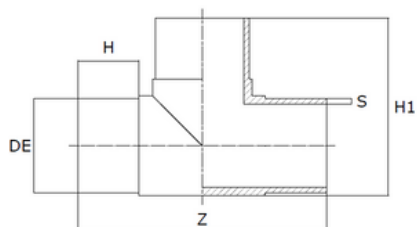

#### BUTT WELDING

CODE	DE	Z	H	H <sub>1</sub>	S	weight (g)
TEN 160T	160	423	104	297	14,6	4200
TEN 200T	200	501	117	356	18,2	7100
TEN 250T	250	595	131	444	22,7	13800
TEN 315T	315	675	155	500	30	25000
TEN 355T	355	1220	430	800	35	53500

Tutti i raccordi TORO 25 sono compatibili con tutte le serie di tubi TORO 25.  
All TORO 25 pipe fittings are compatible with all TORO 25 pipe series.

NSF 61 approved

STANDARD:

- ISO 15874
- ISO 15494
- DIN 8077-78